



2022
CATALOG
SECURED ENTRANCES WORLDWIDE
www.amajautodoor.com

Central Office:
Unit 8, No 174, Jalal Al Ahmad Blu, Ashrafi
Esfahani St, Tehran, Iran.
Phone: +98 21 44 27 3600
Whatsup : +98 910 929 17 90

RVH 1100D FULL HEIGHT TURNSTILE

Operation

Adjustable manual passage to either direction. Optional: Motorized

Chassis

1.5 mm thick, AISI 304 quality stainless steel.

Optional: AISI 316 quality. With various color options electrostatic powder coated.

Rotor and Arms

3 wings, 10 arms. AISI 304 quality stainless steel.

Optional: AISI 316 quality. With various color options electrostatic powder coated.

Functions

Passage information. Ability to set the passage time. Memory mode. Adjustable audio warning. Remote controlled passage direction and enable feature.

Mechanism

Tempered steel and zinc coating.

Fail-Safe (Free passage during power failure). Optional: Fail lock.

Emergency Mode

The arms allow free passage when the signal received from fire detection system.

Operating Voltage

100-230 VAC, 47-60 Hz

Power Consumption

14W during passages, 24W during stand-by

Operating Temperature

-20° / +70° Optional: with heater -50°

Passage Speed

~40 persons / minute.

Passage Width

56 cm

Weight

~330 kg

Security Level

High Security.

Indicators

Standart in both directions.

Areas of Use






Suitable for indoor and outdoor use.

Accessories

Heater. Internal lightening. Stainless steel reader bracket. Button control unit.

Remote control unit. Coin console. Stainless steel bottom plate.

RS232 / RS485 / LAN communication unit. Adaptor.

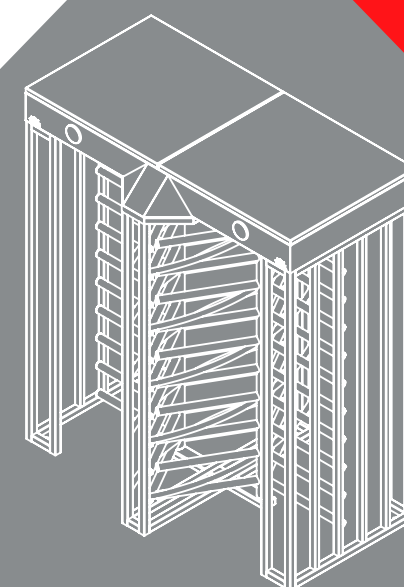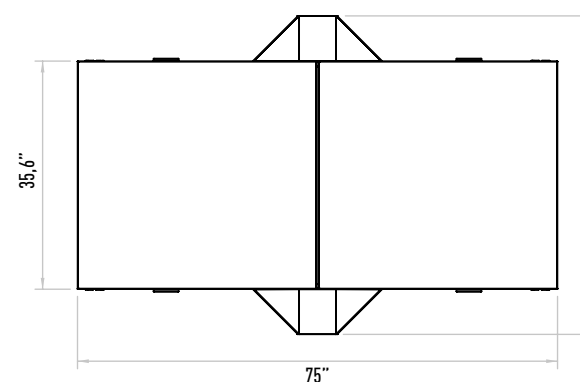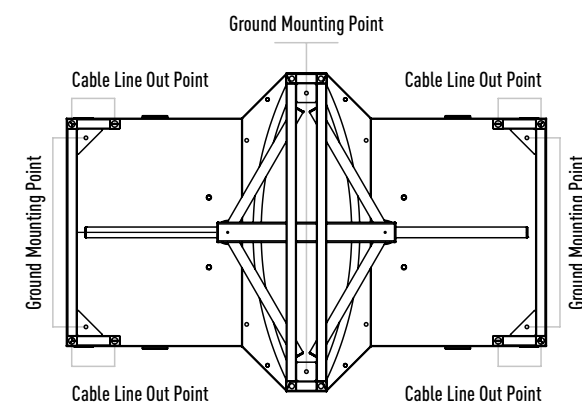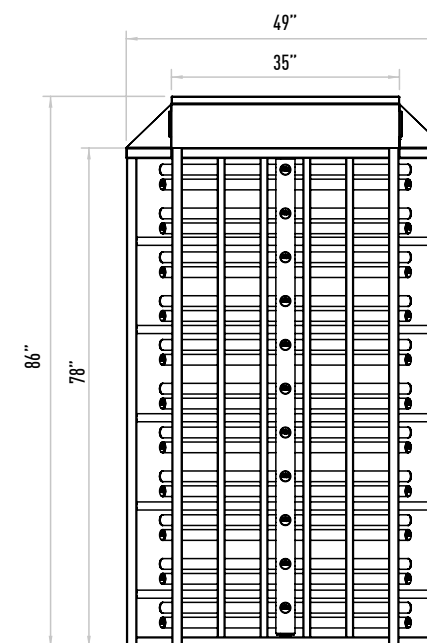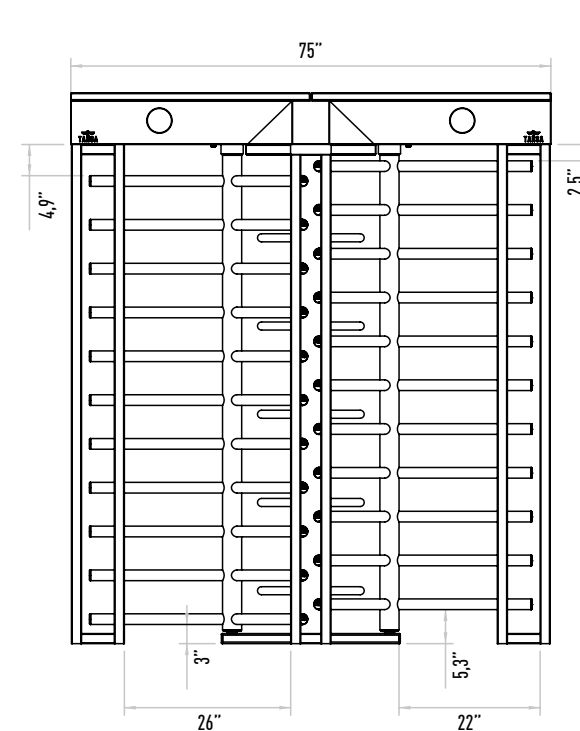

RVH 1100D FULL HEIGHT TURNSTILE

Operation

Adjustable manual passage to either direction. Optional: Motorized

Chassis

1.5 mm thick, AISI 304 quality stainless steel.

Optional: AISI 316 quality. With various color options electrostatic powder coated.

Rotor and Arms

3 wings, 10 arms. AISI 304 quality stainless steel.

Optional: AISI 316 quality. With various color options electrostatic powder coated.

Functions

Passage information. Ability to set the passage time. Memory mode. Adjustable audio warning. Remote controlled passage direction and enable feature.

Mechanism

Tempered steel and zinc coating.

Fail-Safe (Free passage during power failure). Optional: Fail lock.

Emergency Mode

The arms allow free passage when the signal received from fire detection system.

Operating Voltage

100-230 VAC, 47-60 Hz

Power Consumption

14W during passages, 24W during stand-by

Operating Temperature

-20° / +70° Optional: with heater -50°

Passage Speed

~40 persons / minute.

Passage Width

56 cm

Weight

~330 kg

Security Level

High Security.

Indicators

Standart in both directions.

Areas of Use

Suitable for indoor and outdoor use.

Accessories

Heater. Internal lightening. Stainless steel reader bracket. Button control unit.

Remote control unit. Coin console. Stainless steel bottom plate.

RS232 / RS485 / LAN communication unit. Adaptor.

